


SIZE	φd	L	H	H1	A	W	T	φE1	φE2	P	φU1	φU2
1/2"	10.6	64.0	42.0	72.0	9.0	135.0	32.0	36.0	42.0	9.0	6.0	6.0
3/8"	12.7	64.0	42.0	72.0	9.0	135.0	32.0	36.0	42.0	9.0	6.0	6.0
1/2"	15.0	68.0	42.0	72.0	9.0	135.0	32.0	36.0	42.0	9.0	6.0	6.0
3/4"	20.0	73.0	49.0	80.0	9.0	135.0	35.0	36.0	42.0	9.0	6.0	6.0
1"	25.0	85.0	58.0	90.0	11.0	170.0	42.5	42.0	50.0	11.0	6.0	7.0
1-1/4"	32.0	94.0	63.0	95.0	11.0	170.0	47.5	42.0	50.0	11.0	6.0	7.0
1-1/2"	38.0	105.0	71.0	106.0	14.0	200.0	52.5	50.0	70.0	14.0	7.0	9.0
2"	50.0	125.0	78.0	113.0	14.0	200.0	62.5	50.0	70.0	14.0	7.0	9.0
2-1/2"	63.5	155.0	101.5	150.0	17.0	300.0	77.5	70.0	102.0	17.0	9.0	11.0
3"	76.0	173.0	109.0	159.0	17.0	300.0	86.5	70.0	102.0	17.0	9.0	11.0

温度变化图  
TEMPERATURE CHART

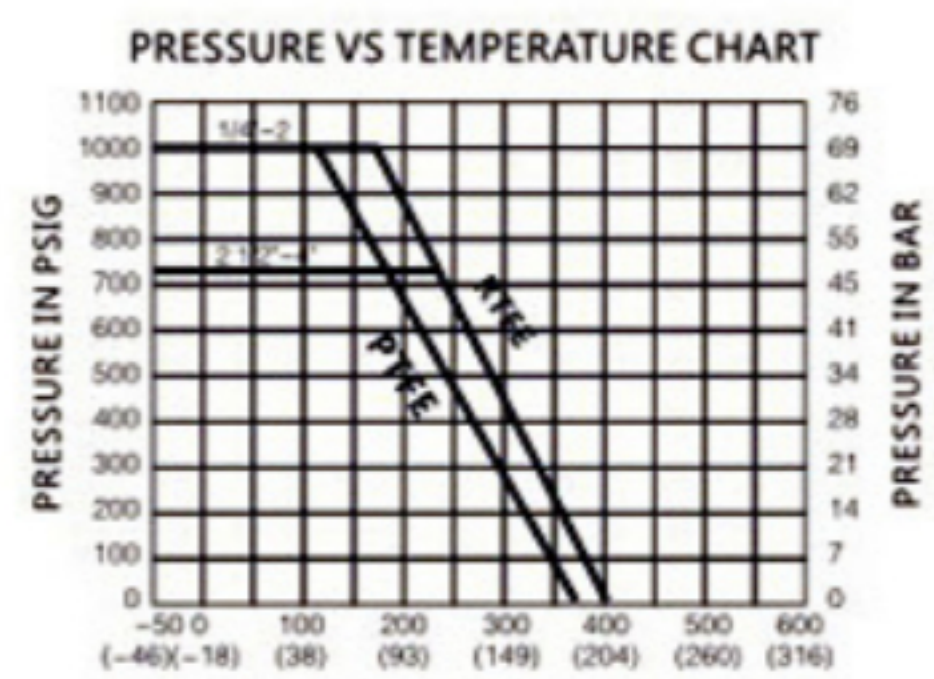

主要零件及材料  
MAIN PARTS AND MATERIALS

序号 NO.	零件名称 Parts description	材质 Material
1	阀体 Body	CF8M / CF8 / WCB
2	阀盖 Cap	CF8M / CF8 / WCB
3	球体 Ball body	316 / 304
4	阀座 Seat	PTFE, PPL
5	阀杆 Stem	316 / 304 / 2Cr13
6	防静电装置 Anti-Static	304
7	止推垫片 Thrust Washer	PTFE
8	填料 Packing	PTFE
9	过渡垫片 Transition Washer	增强聚四氟乙烯、柔性石墨 RPTFE, Flexible graphite
10	填料压环 Packing ring	304
11	蝶簧 Bellivel Washer	304
12	螺母 Nut	304
13	防松盖 Stop-lock cap	304
14	手柄螺母 Handle Nut	304
15	限位片 Lock Device	304
16	手柄 Handle	304
17	手柄套 Handle sleeve	塑料 Plastics
18	定位螺钉 Stop bolt	304
19	密封垫圈 Body Gasket	PTFE

产品特征  
SPECIFICATIONS

公称压力:  
1000WOG(Class 400), PN 64  
2000WOG(Class 800), PN 130  
适用温度范围: -20 ~ 300°C  
适用介质: 水、油、气及某些腐蚀性液体(W.O.C)  
螺纹类型: G.NPT BSPT.BSP DIN 259/2999

Working Pressure:  
1000WOG(Class 400), PN 64  
2000WOG(Class 800), PN 130  
Temperature Range: -20 ~ 300°C  
Suitable medium: Water, oil, air and some  
Corrosive liquid  
Thread type: G.NPT BSPT.BSP DIN 259/2999