


SIZE	φd	L	H	H1	A	W	φB	φE1	φE2	P	φU1	φU2
1/2"	15.0	72.0	42.0	72.0	8.0	135.0	22.7	36.0	42.0	9.0	6.0	6.0
3/4"	20.0	81.0	48.5	80.0	9.0	135.0	27.5	36.0	42.0	9.0	6.0	6.0
1"	25.0	98.0	58.5	90.0	11.0	170.0	33.5	42.0	50.0	11.0	6.0	7.0
1-1/4"	32.0	112.0	63.0	95.0	11.0	170.0	42.0	42.0	50.0	11.0	6.0	7.0
1-1/2"	38.0	126.0	71.0	106.0	14.0	200.0	48.6	50.0	70.0	14.0	7.0	9.0
2"	50.0	145.0	78.0	113.0	14.0	200.0	60.5	50.0	70.0	14.0	7.0	9.0
2-1/2"	65.0	176.0	100.0	149.0	17.0	300.0	76.3	70.0	102.0	17.0	9.0	11.0
3"	78.0	195.0	109.0	159.0	17.0	300.0	90.0	70.0	102.0	17.0	9.0	11.0
4"	100.0	227.0	140.0	205.0	22.0	400.0	106.5	-	102.0	12.0	-	11.0

温度变化图
TEMPERATURE CHART

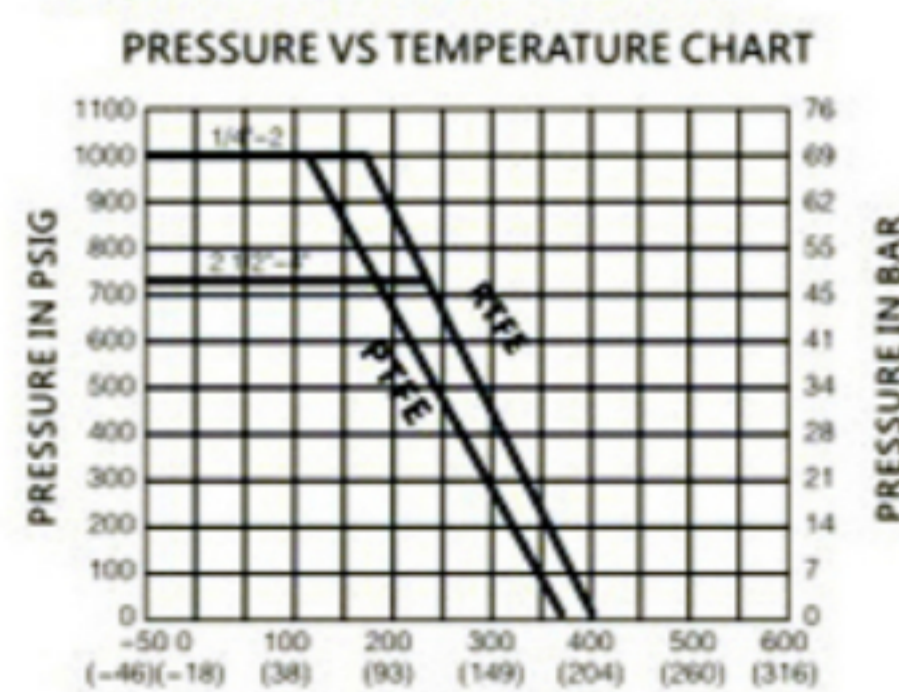

主要零件及材料
MAIN PARTS AND MATERIALS

序号 NO.	零件名称 Parts description	材质 Material
1	阀体 Body	CF8M CF8 WCB
2	阀盖 Cap	CF8M CF8 WCB
3	球体 Ball body	316 304
4	阀座 Seat	PTFE, PPL
5	螺母 Nut	A193-B8 A193-B7
6	阀杆 Stem	316 304 2Cr13
7	防静电装置 Anti-Static	304
8	止推垫片 Thrust Washer	PTFE
9	填料 Packing	PTFE
10	过滤垫片 Transition Washer	增强聚四氟乙烯、柔性石墨 RPTFE, Flexible graphite
11	填料压环 Packing ring	304
12	蝶簧 Bellivel Washer	304
13	螺母 Nut	304
14	防松盖 Stop-lock cap	304
15	弹垫 Bolt Washer	304
16	螺栓螺母 Bolt Nut	304
17	手柄螺母 Handle Nut	304
18	限位片 Lock Device	304
19	手柄 Handle	304
20	手柄套 Handle sleeve	塑料 Plastics
21	定位螺钉 Stop bolt	304
22	锁紧螺丝 Set Screw	304
23	手柄 Handle	304
24	扳头 Handle Adapter	CF8

产品特征
SPECIFICATIONS

公称压力:
1000WOG(Class 400), PN 64
2000WOG(Class 800), PN 130
适用温度范围: -20 ~ 300°C
适用介质: 水、油、气及某些腐蚀性液体(W.O.G)
对焊标准: GB12224 ANSI B 16.25

Working Pressure:
1000WOG(Class 400), PN 64
2000WOG(Class 800), PN 130
Temperature Range: -20 ~ 300°C
Suitable medium: Water, oil, air and some
Corrosive liquid
Butt-welding standard: GB12224 ANSI
B 16.25