


尺寸DN	Size	φd	L	F	H	H1	φB1	φB2	P	φA1	φA2	A	W	B	螺纹类型Screw Type
15	1/2"	11.0	79.0	39.5	42.0	70.0	42.0	36.0	9.0	6.0	6.0	9.0	135.0	27.0	NPT
20	3/4"	15.0	88.0	44.0	49.0	77.0	50.0	36.0	9.0	6.0	7.0	9.0	135.0	34.0	BSP
25	1"	20.0	108.0	54.0	59.5	87.0	50.0	42.0	11.0	6.0	7.0	11.0	170.0	41.0	PT
32	1-1/4"	25.0	124.0	62.0	63.0	93.0	70.0	42.0	11.0	6.0	9.0	11.0	170.0	50.0	DIN
40	1-1/2"	32.0	135.0	67.5	73.5	103.0	70.0	50.0	14.0	7.0	9.0	14.0	200.0	56.0	etc.
50	2"	40.0	164.0	82.0	82.5	113.0	70.0	50.0	14.0	7.0	9.0	14.0	200.0	70.0	

主要零件及材料 MAIN PARTS AND MATERIALS

序号 NO.	零件名称 Parts description	材质 Material
1	阀体 Body	CF8M / CF8 / WCB
2	阀盖 Cap	CF8M / CF8 / WCB
3	球体 Ball body	316 / 304
4	阀座 Seat	PTFE / PPL
5	阀杆 Stem	316 / 304 / 2Cr13
6	阀盖垫圈 Body Gasket	PTFE
7	防静电装置 Anti-Static	304
8	止推垫片 Thrust Washer	PTFE
9	填料垫圈 Transition Washer	PTFE
10	过渡垫片 Transition Washer	增强聚四氟乙烯、柔性石墨 RPTFE、Flexible graphite
11	填料压环 Packing ring	304
12	蝶簧 Bellivel Washer	304
13	螺母 Nut	304
14	防松盖 Stop-lock cap	304
15	手柄螺母 Handle Nut	304
16	限位片 Lock Device	304
17	手柄 Handle	304
18	手柄套 Handle sleeve	塑料 Plastics
19	定位螺钉 Stop bolt	304

温度变化图 TEMPERATURE CHART PN1.6MPA

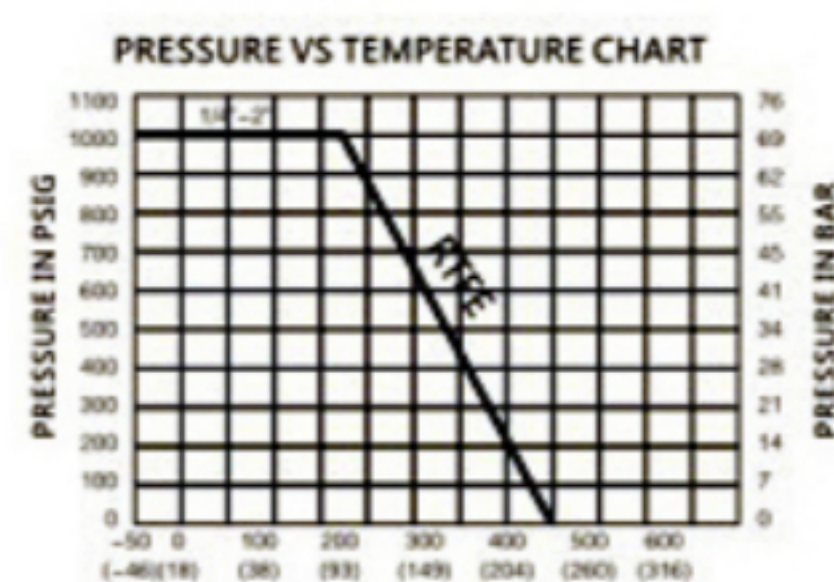

产品特征 SPECIFICATIONS

公称压力: 1000WOG(Class 400), PN64
 适用温度范围: -20 ~ 250°C
 适用介质: 水、油、气及某些腐蚀性液体(W.O.G)
 螺纹类型: G · NPT.BSPT.BSP DIN259/2999

Working Pressure: 1000WOG(Class 400), PN64
 Temperature Range: -20 ~ 250°C
 Suitable medium: Water, oil, air and
 some Corrosive liquid
 Thread type: G · NPT.BSPT.BSP DIN259/2999